


ASHLEY SLING, INC.

Three Leg Bridle Slings

ASI-303-E

Single Rope Legs, Oblong Link, Eye-Hoist Hooks and Flemished Loops.

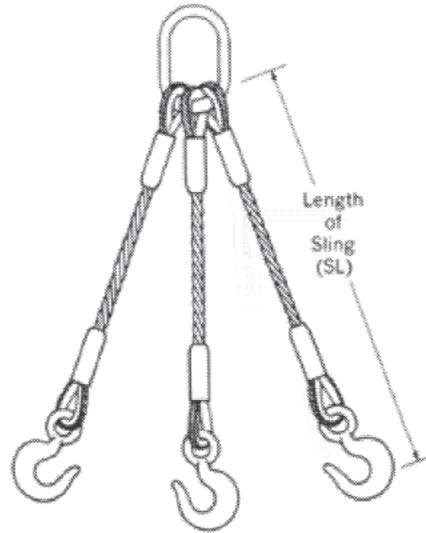

Diam. of Rope (inches)	Minimum Length of Sling (SL) ft.-in.	Rated Capacities* in Tons when used		
		60°	45°	30°
1/4	1 - 3	1.7	1.4	.97
3/8	1 - 8	3.7	3.0	2.2
1/2	2 - 0	6.6	5.4	3.8
5/8	2 - 4	10	8.3	5.9
3/4	2 - 9	15	12	8.4
7/8	3 - 3	20	16	11
1	3 - 6	26	21	15
1 1/8	4 - 0	31	26	18
1 1/4	4 - 6	38	31	22
1 3/8	5 - 0	46	38	27
1 1/2	5 - 6	55	45	32
1 3/4	6 - 6	74	60	42
2	8 - 0	95	78	55

* Rated capacities are given in tons of 2000 lb. using EIPS rope with IWRC.

WARNING: Do not exceed rated capacities. Failure to follow proper inspection, care and use criteria may result in personal injury or death.