


# ASHLEY SLING, INC.

## Four Leg Bridle Slings

ASI-404-C

Single Rope Legs, Oblong Link, Eye-Hoist Hooks and Flemished Loops.

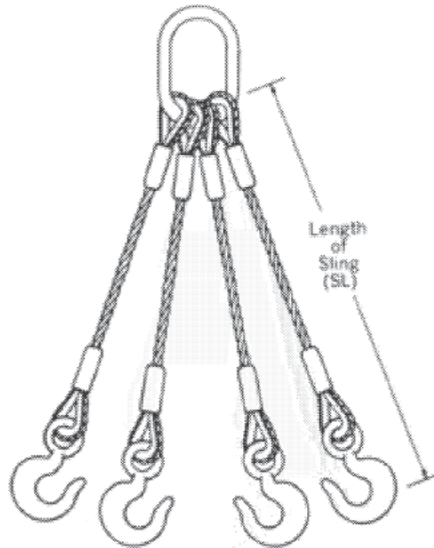

Diam. of Rope (inches)	Minimum Length of Sling (SL) ft.-in.	Rated Capacities* in Tons when used		
		60°	45°	30°
1/4	1 - 3	2.2	1.8	1.3
3/8	1 - 8	5.0	4.1	2.9
1/2	2 - 0	8.8	7.1	5.1
5/8	2 - 4	14	11	7.8
3/4	2 - 9	19	16	11
7/8	3 - 3	26	21	15
1	3 - 6	34	28	20
1 1/8	4 - 0	42	34	24
1 1/4	4 - 6	51	42	30
1 3/8	5 - 0	62	50	36
1 1/2	5 - 6	73	60	42
1 3/4	6 - 6	98	80	57
2	8 - 0	127	104	73

\* Rated capacities are given in tons of 2000 lb. using EIPS rope with IWRC.

**WARNING: Do not exceed rated capacities. Failure to follow proper inspection, care and use criteria may result in personal injury or death.**