



Pivot Hoist Rings



HR-100 UNC

- Forged bail provides the following:
 - Easily readable raised lettering showing the name Crosby or "CG" and PIC code for material traceability.
 - More durability provides the increased "Toughness" desired in potentially abusive field conditions.
 - Larger opening than standard Hoist Ring bails.
- 180 degree pivot action at full capacity.
- Bolts included as part of assembly.
- Design Factor of 5 to 1.
- Individually Proof Tested to 2-1/2 times Working Load Limit.
- UNC Bolt specification is a Grade 8 Alloy socket head cap screw to ASTM A 574.
- Frame 2 and larger are **RFID EQUIPPED**.

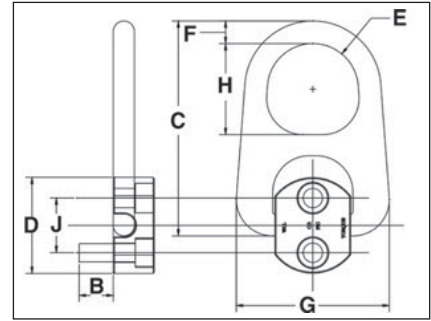

Load Rated



Rigging Accessories

HR-100 Pivot Hoist Rings Coil Threads

Frame Size No.	HR-100 Stock No.	Working Load Limit (lbs.)*	Torque in Ft-Lbs.	No. of Bolts	Weight Each (lbs.)	Dimensions (in.)									
						Bolt Size A	Effective Thread Projection Length B	C	Diameter D	Radius E	F	G	H	J	K
1	1067408	2000	7	2	.6	5/16-18 x 125	.82	3.43	2.00	.62	.44	2.27	1.38	1.00	-
2	1067417	2500	12	2	3.1	3/8-16 x 125	.65	6.03	2.25	1.25	.75	4.20	2.50	1.13	-
2	1067426	5000	28	2	3.3	1/2-13 x 2.00	1.40	6.03	2.63	1.25	.75	4.20	2.50	1.50	-
3	1067435	12000	28	4	10.5	1/2-13 x 2.75	1.65	8.27	3.13	1.63	1.00	6.25	3.25	1.63	1.25
4	1067444	20000	60	4	22.0	5/8-11 x 3.25	1.65	10.63	4.47	2.00	1.25	7.82	4.00	2.06	1.25

*Ultimate Load is 5 times the Working Load Limit.