




How to Order

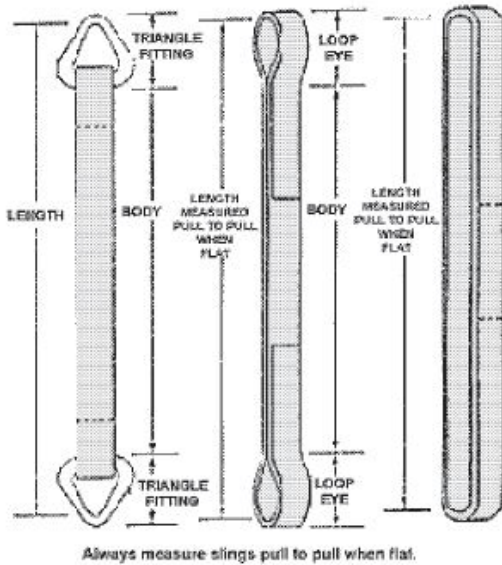


When ordering slings consider the following:

- Type of Hitch
- Capacity tables
- Sling to Load Angles.

Available Web Sling Codes

- TC- Triangle & Choker End Fitting
- TT- Triangle & Triangle End Fittings
- EE- Eye & Eye – Flat Eyes, standard – Eye & Eye – Twisted Eye
- EN – Endless
- RE – Reversed Eye
- SH – Stone Handling
- WL- Wide Lift
- WLA – Wide Lift Attached Eye

Web Sling Order Code

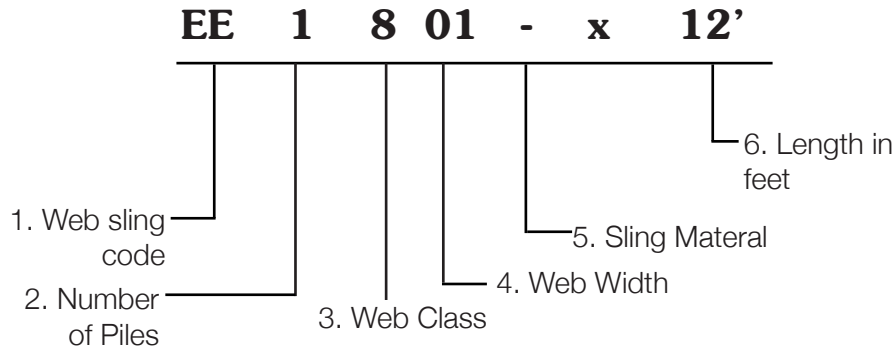

Eye Length Chart

Eye lengths of types 3&4 varieties with sling width and number of webbingsplies.

Sling Width	Plies of Webbing			
	1	2	3	4
1"	10"	12"	14"	14"
2"	10"	12"	14"	14"
3"	14"	14"	16"	16"
4"	14"	14"	16"	16"
5"	14"	14"	16"	16"
6"	16"	16"	18"	18"
8"	18"	18"	20"	20"
10"	24"	24"	26"	26"
12"	24"	24"	26"	26"

Number of plies

This refers to the number of thickness of webbing in the body of the slings. Generally available in 1,2,3 and 4 plies.

Width

Standard web widths range from 1" through 12". Standard sling widths up to 24".

Sling Material

Unless specified, nylon webbing will be standard. Polyester webbing is also available.

Treatment for abrasion

Unless specifically requested, all nylon & polyester web slings will have an abrasion-resistant treatment applied.